

## PRODUCT



# SOLARWATT Panel vision GM 3.0 pure

## Glass-Glass module

### Solid quality with high performance

Thanks to their modern design Solarwatt glass-glass modules deliver the highest long-term yields. They are robust and more resilient than their predecessors. PERC half-cut-cells enable modules that are optimized for maximum performance.

The solar cells are embedded almost indestructibly in the glass-glass composite and thus optimally protected against all weather effects and mechanical stress. Solarwatt can therefore offer a 30-year warranty on performance and product quality.

The Solarwatt FullCoverage insurance is included for 5 years and free of charge. It insures almost all risks and takes effect even if the modules do not produce electricity or deliver less than expected in the event of damage.



## PRODUCT QUALITY

- ammonia resistant
- intensive hailstorm resistant
- salt mist resistant
- LeTID tested
- 100 % plus-sorting
- PID protected
- snow-load warranty
- max. 12,150/ 5,400 Pa



## SERVICE

**FullCoverage insurance**  
included (up to 1,000 kWp)\*


**Simple returns policy**  
as per „Delivery terms for Solarwatt solar modules“

**30 Year Product Warranty**  
as per „Warranty conditions for SOLARWATT Panel vision“

**30 Year Performance Warranty**  
on 90 % of nominal power as per „Warranty conditions for SOLARWATT Panel vision“

\* country-specific deviations apply

## DIMENSIONS

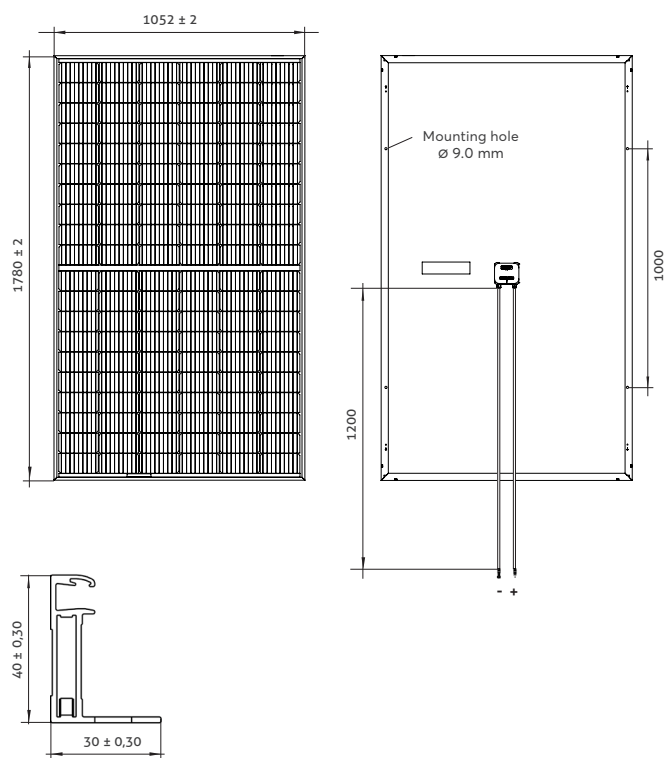

## GENERAL DATA

<b>Module technology</b>	Glass-glass laminate; aluminum frame
<b>Covering material</b>	Tempered solar glass with anti-reflective finish, 2mm
<b>Encapsulation</b>	Solar cells in polymer encapsulation, white
<b>Backing material</b>	Tempered glass, 2mm
<b>Solar cells</b>	120 monocrystalline high power PERC-solar cells
<b>Cell dimensions</b>	166 x 83 mm
<b>L x W x H / Weight</b>	$1,780^{\pm 2} \times 1,052^{\pm 2} \times 40^{\pm 0,3}$ mm / appr. 25 kg
<b>Connection technology</b>	Cables 2 x 1,2 m/ 4 mm <sup>2</sup> Stäubli Electrical MC4 or MC4-type connectors
<b>Bypass diodes</b>	3
<b>Max. system voltage</b>	1,000 V
<b>IP rating</b>	IP67
<b>Protection class</b>	II (acc. to IEC 61140)
<b>Fire class</b>	A (acc. to IEC 61730/UL 790) E (acc. to EN 13501-1) B <sub>ROOF</sub> (t1) (acc. to EN13501-5)
<b>Certified mechanical ratings as per IEC 61215</b>	Pressure load up to 8,100 Pa (test load 12,150 Pa) Suction load up to 3,600 Pa (test load 5,400 Pa)
<b>Recommended stress load as per Installation Instructions</b>	Please refer to the specifications in the Installation Instructions and Warranty Conditions.
<b>Qualifications</b>	IEC 61215   IEC 61730   LeTID   IEC 61701 IEC 62804   IEC 62716   MCS 005

## ELECTRICAL DATA (STC)

STC (Standard Test Conditions): Irradiation intensity 1,000 W/m<sup>2</sup>, spectral distribution AM 1,5 | Temperature 25 ± 2 °C, in accordance to EN 60904-3

	370 Wp	375 Wp	380 Wp	385 Wp
<b>Nominal power P<sub>max</sub></b>	370 Wp	375 Wp	380 Wp	385 Wp
<b>Nominal voltage V<sub>mp</sub></b>	34.5 V	34.9 V	35.3 V	35.7 V
<b>Nominal current I<sub>mp</sub></b>	10.8 A	10.8 A	10.8 A	10.9 A
<b>Open circuit voltage V<sub>oc</sub></b>	41.4 V	41.5 V	41.6 V	41.8 V
<b>Short circuit current I<sub>sc</sub></b>	11.4 A	11.4 A	11.4 A	11.5 A
<b>Module efficiency</b>	19.9 %	20.2 %	20.4 %	20.7 %

Measurement tolerances: P<sub>max</sub> ±5 %; V<sub>oc</sub> ±10 %; I<sub>sc</sub> ±10 %, I<sub>mp</sub> ±10 %

Reverse-current power rating I<sub>r</sub>: 20 A, operating modules with an external power source is only permissible if using a phase fuse with a tripping current of ≤ 20 A.

## ELECTRICAL DATA (NMOT AND WEAK LIGHT)

NMOT (Nominal Module Operating Temperature): Irradiation intensity 800 W/m<sup>2</sup>, spectral distribution AM 1,5, Temperature 20 °C  
Weak light conditions: Irradiation intensity 200 W/m<sup>2</sup>, Temperature 25 °C, Wind speed 1 m/s, load operation

	277 W	281 W	284 W	288 W
<b>Nominal power P<sub>max @NMOT</sub></b>	277 W	281 W	284 W	288 W
<b>Nominal power P<sub>max @200 W/m<sup>2</sup></sub></b>	72.4 W	73.4 W	74.3 W	75.3 W

Measurement tolerances: P<sub>max</sub> ±5 %; V<sub>oc</sub> ±10 %; I<sub>sc</sub> ±10 %, I<sub>mp</sub> ±10 %

Reduction of module efficiency when irradiance is reduced from 1,000 W/m<sup>2</sup> to 200 W/m<sup>2</sup> (at 25 °C): 4 ± 2 % (relative) / -0,6 ± 0,3 % (absolute).

## THERMAL FEATURES

<b>Operating temperature range</b>	-40 ... +85 °C
<b>Ambient temperature range</b>	-40 ... +45 °C
<b>Temperature coefficient P<sub>max</sub></b>	-0.34 %/K
<b>Temperature coefficient V<sub>oc</sub></b>	-0.27 %/K
<b>Temperature coefficient I<sub>sc</sub></b>	0.04 %/K
<b>NMOT</b>	44 °C

## TRANSPORT AND PACKAGING

<b>Modules per pallet</b>	32
<b>Pallet dimensions (gross) L x W x H</b>	1,800 x 1,070 x 1,550 mm
<b>Gross weight per pallet</b>	847 kg
<b>Pallets per truck</b>	14
<b>Modules per truck</b>	448